IS1005si, IS1006si, IS1007si, IS1008si











Durable, bulb-type silicone compression seals, which can be easily kerf mounted into the rebates of timber door and window frames. These provide ideal smoke and acoustic seals for single action doors. These silicone compression seals can be fitted into a nominal 3mm wide kerf of sufficient depth.

Gap size

- IS1005si: Required Door Clearance 3-5mm
- IS1006si: Required Door Clearance 3-6mm
- IS1007si: Required Door Clearance 4-7mm
- IS1008si: Required Door Clearance 5-8mm

Standard lengths

• 50 metre coils

Standard colours

- Black
- Grey
- (Dark brown available to special order)

Approval/s

- Conforms with BCA Specification C3.4 smoke sealing requirements
- Acoustically tested in accordance with AS1191, IS0140.3 and IS010140-2








IS1006si




IS1007si



IS1008si

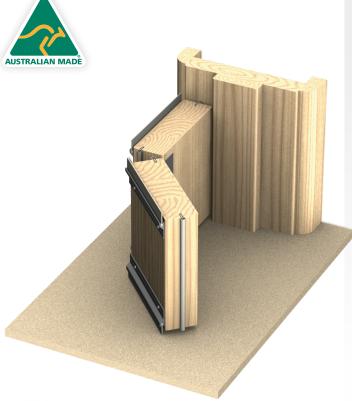

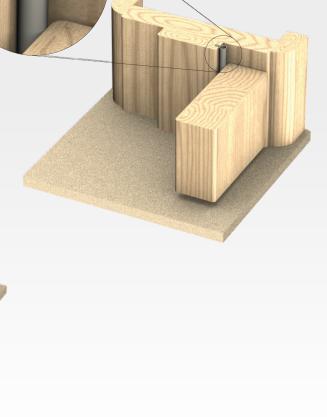

Kilargo IS1002si Datasheet | Last edit 10/04/2018

