

ISO511-T4, ISO511-T6



Incorporated into door assemblies for its medium temperature smoke and acoustic properties. Also used as a privacy seal on toilet cubicle doors.

This rigid PVC base seal has co-extruded flame retardant, twin flexible smoke and acoustic fins. It fits quickly and easily into a nominal 3mm (wide) by 5mm (deep) interference fit groove.

* This seal is available with either a 4mm or 6mm fin height.

Product & Gap Sizing

- 4mm Fin Height > min. 2mm / max. 3mm
- 6mm Fin Height > min. 3mm / max. 5mm

Standard lengths


- 1000mm
- 2100mm
- 2400mm
- 2700mm
- 3000mm

Standard colours


- Black (white, grey & dark brown colours available to special order)

Approval/s

- Fire tested to AS1530 Part 4 in accordance with AS1905 Part 1
- Medium temperature smoke leakage approvals to AS1530 Part 7, compliant with AS6905 on proprietary door assemblies
- Conforms with BCA Specification C3.4 smoke sealing requirements
- Acoustically tested in accordance with AS1191, ISO140.3 and ISO10140-2
- Durability tests demonstrating over 100,000 open and close cycles

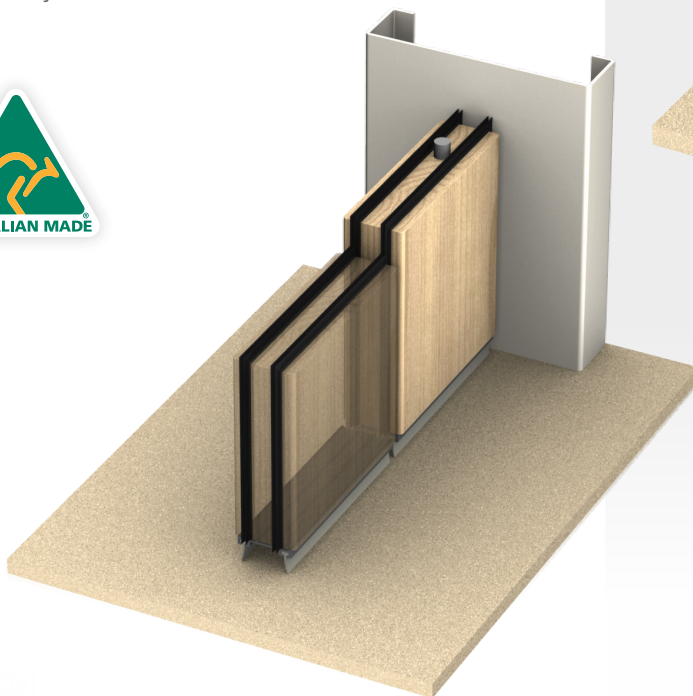

ISO511-T4



ISO511-T6

