

IS1046si



A durable silicone compression seal with self-adhesive backing, mounted against door stops around perimeters of single swing doors. This bulb version has reinforced ribs to provide extra strength in service.

NB. When adhering to frames, contact surfaces must be clean.

Gap size

- Min. 3mm / max. 5mm

Standard lengths


- 50 metre coils

Standard colours

- Black
- Grey
- (Dark brown available to special order)

Approval/s

- Fire tested to AS1530 Part 4 in accordance with AS1905 Part 1
- Certifications GVI.R26629, GVWZ.R26629, GVWZ7.R26629
- Medium temperature smoke leakage approvals to AS1530 Part 7, compliant with AS6905 on proprietary door assemblies
- Acoustically tested in accordance with AS1191, ISO140.3 and ISO10140-2

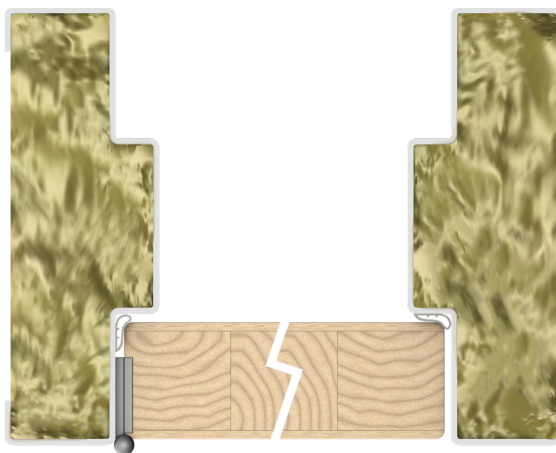

IS1046si

