IS8210si

A rebated automatic door bottom seal for single action doors which is spring loaded to swing clear of the floor as soon as the door is opened by a few millimetres. The unique "swing-seal" operates automatically by pressure against the door jamb on its adjustable strike button.

The seal is mounted into a 10mm deep x 31mm wide machined groove along the underside of the door. Aesthetic, nylon push-fit end plates ensure longevity of the seal mechanism.

Standard lengths

- 620mm
- 720mm
- 820mm
- 920mm
- 1020mm
- 1220mm

IS8210si maximum allowable cut-back sizes:

- 620mm seal cuts to 520mm
- 720mm seal cuts to 620mm
- 820mm seal cuts to 720mm
- 920mm seal cuts to 820mm
- 1020mm seal cuts to 920mm
- 1220mm seal cuts to 1020mm
- (*Seals can be cut on site for exact dimension)

Standard colours


• Silver anodised aluminium with grey silicone rubber gasket and grey reinforced nylon push-fit end plates





IS8210si

30

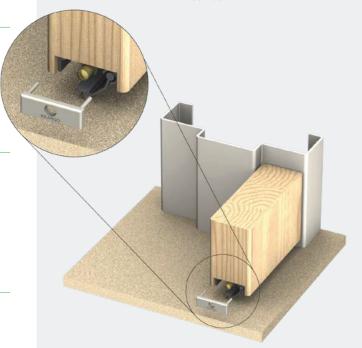

Kilargo IS8210si | Last edit 10/04/2018

