

IS7010si, IS7020si



The IS7010si and IS7020si are aesthetically designed, slim-line compression type perimeter seals for installation around the head and jambs of single swing doors. They are proven to be effective acoustic, smoke, light, dust and weather seals.

The aluminium carrier is pre-drilled and slotted for adjustable retrofit installation. The easy to install, "snap-on", anodised aluminium cover plates provide concealed fixings.

Gap size

- Min. 0mm / max. 6mm

Door set standard lengths

- Single: 1 x 1000mm, 2 x 2100mm
- Long Single: 1 x 1000mm, 2 x 2750mm
- Double: 3 x 2100mm
- Long Double: 1 x 2100mm, 2 x 2750mm

Standard lengths

- 1000mm
- 2250mm

Also available in individual lengths:

- 250mm increments from 1000mm to 5000mm

Standard colours





- Silver anodised aluminium with grey silicone gasket
(Black silicone gaskets also available upon request)

Approval/s

- Fire tested to AS1530 Part 4 in accordance with AS1905 Part 1
- Certifications GVV1.R26629, GVWZ.R26629, GVWZ7.R26629
- Medium temperature smoke leakage approvals to AS1530 Part 7, compliant with AS6905 on proprietary door assemblies
- Acoustically tested in accordance with AS1191, ISO140.3 & ISO10140-2

Features

- Ambient (cold) temperature smoke control
- Medium temperature smoke containment (200°C)
- Approved for use on proprietary smoke doors
- Approved for use on proprietary fire doors
- Antimicrobial version available
- Sound containment (acoustics)
- Energy efficient

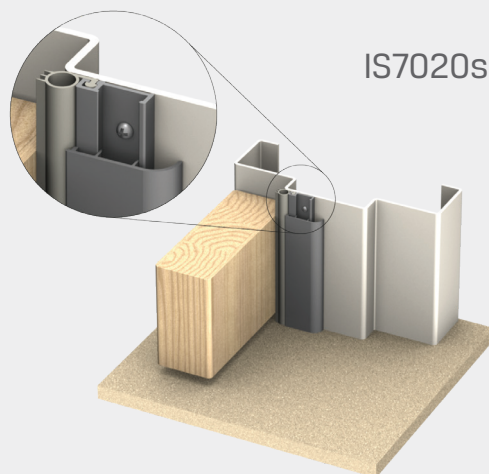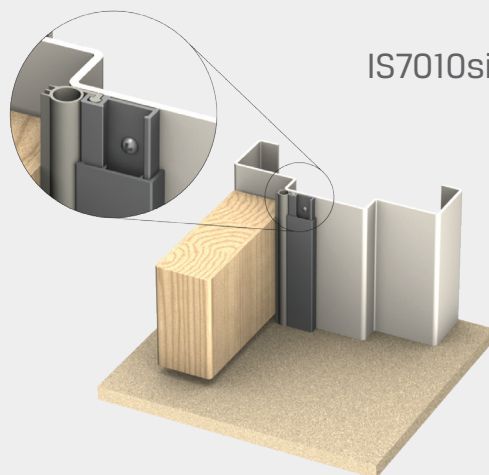

All seals proudly manufactured in Australia