

QF1209 Q-Seal



A combined acoustic, energy and smoke durable push-fit solid silicone rubber compression seal incorporating a barbed base and flexible offset curved fin seal.

No mechanical fixings or screws required.

Gap size

- To suit 2mm - 5mm gap

Standard lengths

- 50 metre coils

Standard colours



- Black
- Grey
- Dark Brown
- White

Approval/s

- Fire tested to AS1530 Part 4 in accordance with AS1905 Part 1
- Certifications GVWZ.R26629, GVWZ7.R26629
- Medium temperature smoke leakage approvals to AS1530 Part 7 available on proprietary door assemblies
- Acoustically tested in accordance with AS1191, ISO140.3 and ISO10140-2
- Durability tests demonstrating over 100,000 open & close cycles

Features

- Ambient (cold) temperature smoke control
- Medium temperature smoke containment (200°C)
- Approved for use on proprietary smoke doors
- Approved for use on proprietary fire doors
- Sound containment (acoustics)
- Energy efficient

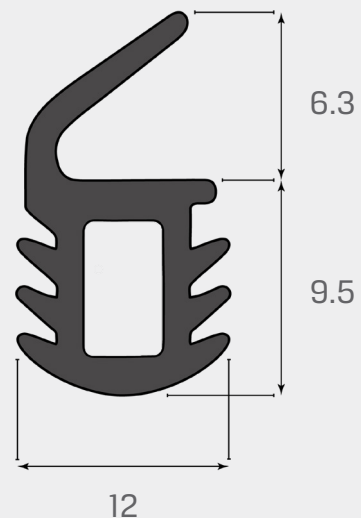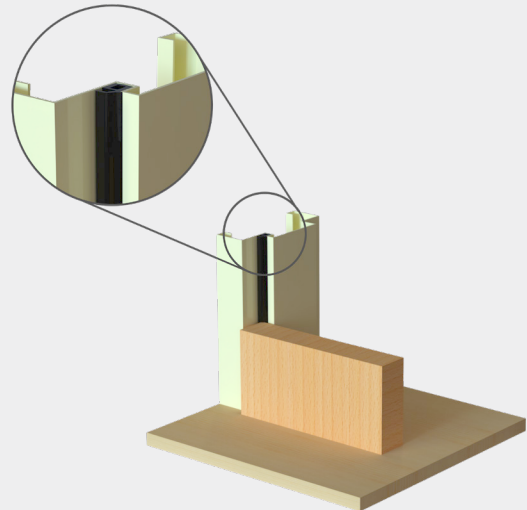

QF1209



All seals proudly manufactured in Australia